


MOUNTING HOLES

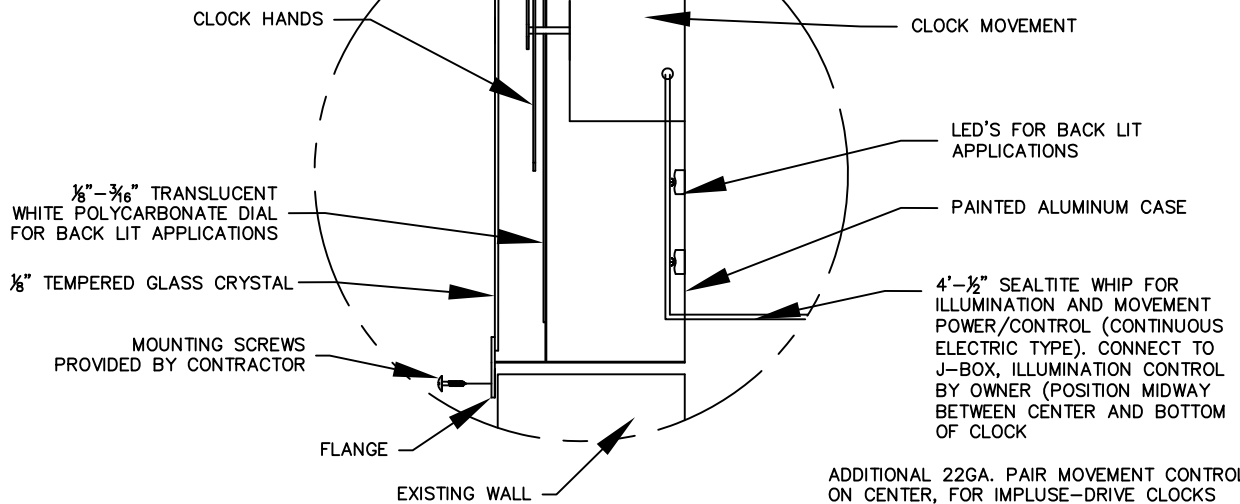

ADDITIONAL 22GA. PAIR MOVEMENT CONTROL WIRE, ON CENTER, FOR IMPLUSE-DRIVE CLOCKS

	24"	30"	36"	42"
CASE DIAMETER (A)	2'	2'-6"	3'	3'-6"
ROUGH OPENING (B)	2'-1/2"	2'-1/2"	3'-1/2"	3'-1/2"
MOUNTING FLANGE DIA. (C)	2'-3"	2'-9"	3'-3"	3'-9"
FACE OPENING (D)	1'-10"	2'-4"	2'-10"	3'-4"
CASE DEPTH (E)	8"	8"	8"	8"

DRAWING:	FLUSH MOUNT CLOCK 24"-42" DIA.
DESCRIPTION:	TYPICAL FLUSH MOUNT CLOCK
DATE DRAWN:	3/23/2011 SCALE: VARIES

**LUMICHRON**  
CLOCKS WORLDWIDE

GRAND RAPIDS MI USA  
PHONE: 616.245.8888  
WWW.LUMICHRON.COM